# ACA-BL10SS-100

## LHD Cable Accessory - Bracket "L", 100mm (3.9") (St Steel) w/ Sleeve - Pack of 100


### L-Bracket

The ACA-BL series L-brackets is designed to support linear heat cable above the risk area e.g. the top run of a cable tray. A silicon protection sleeve is supplied with the unit to protect the sensor cable when fastened to the bracket.

### Installation

The ACA-BL may be fitted to the cable tray and secured in place using a suitable bolt and nut at one end. The hole at the other end of the bracket allows for the securing of the sensor cable using a silicone sleeve and cable tie. The L-bracket allows support for the sensor cable at the selected distance away from the detection area.

Recommended spacing: 1m

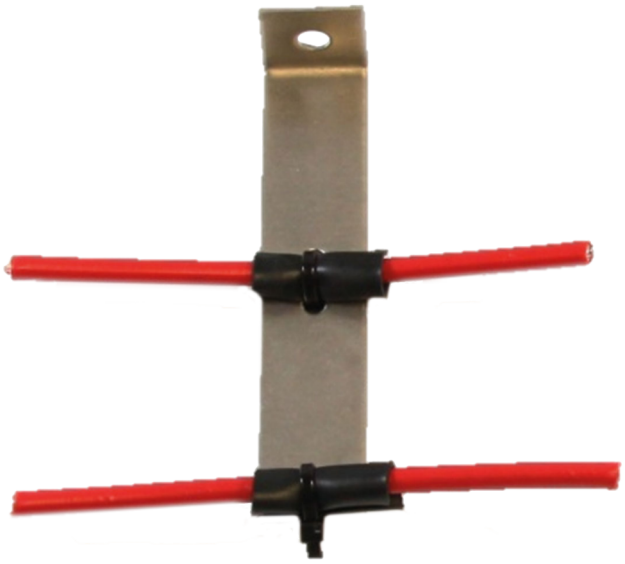

### Details

- Easy installation of linear heat cable
- For use on cable trays
- Available in stainless steel
- Available in quantities of 100

# ACA-BL10SS-100

## LHD Cable Accessory - Bracket "L", 100mm (3.9") (St Steel) w/ Sleeve - Pack of 100

## Technical specifications

### Physical

| | |
|---|---|
| Physical dimensions | 20 x 100 mm (W x L) |
| Net weight | 1.65 kg |
| Mounting type | Surface mount |
| Material (body) | Stainless steel |

### Environmental

| | |
|---|---|
| Environment | Indoor, Outdoor |

KIDDE GLOBAL SOLUTIONS

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 7 September 2023 - 15:32