# PSB-0009

## LED beacon (VID), red shallow base, red lens

### General

The PSB-0009 is a general purpose LED VID (Visual Indicator Device) for fire alarm applications. It features a first-fix base containing all wiring connections allowing for easy removal/placement of the device.

### Easy and Fast Installation

The PSB-0009 allows faster installation and maintenance thanks to an innovative mounting base. Dispensing with the need for locking screws, this device uses a TimeSaver™ base. Heads are simply locked onto the base with a “twist and click” action, allowing fitting or removal at any time because the base is the only component that needs to be wired. As the cabling requirement is reduced, commissioning time and costs are naturally reduced as well.

### Efficient and versatile

A mechanism for optionally locking the VID to the base may be activated if required. Once activated, a special tool is required to remove the VID from the base.

The PSB-0009 utilises a full faced translucent case, giving a much larger lens area and a greater spread of light.



### Details

- High efficiency LEDs for low current consumption
- Simple ‘First Fix’ installation with wiring directly to first-fix base
- Anti-tamper locking mechanism prevents unauthorised removal
- Shallow mounting base for low profile installation

# PSB-0009

## LED beacon (VID), red shallow base, red lens

## Technical specifications

### General

| | |
|---|---|
| Compatibility | Conventional notification systems |
| System support | Kidde Commercial - Conventional notification circuits |

### Electrical

| | |
|---|---|
| Power supply type | VDC |
| Operating voltage | 17 to 60 VDC |
| Current consumption | 5 mA |

### VID

| | |
|---|---|
| Colour | Red |
| Rating | Continuous |
| Flash frequency | 60/min |
| Synchronization | Supported |

### Physical


| | |
|---|---|
| Physical dimensions | 100 x 80 mm (Ø x D) |
| Net weight | 220 g |
| Colour | Red |
| Mounting type | Base mount, Ceiling mount, Wall mount |
| Mounting position | Base |
| Mounting base | Shallow |
| Material | Flame retardant Polycarbonate |
| Texture | Smooth |

### Environmental

| | |
|---|---|
| Vandal proof | No |
| Operating temperature | -25 to +70°C |
| Environment | Indoor |
| IP rating | IP21 |

### Regulatory

| | |
|---|---|
| Compliancy | CE, REACH, RoHS 3, WEEE |
| Certification | CE |

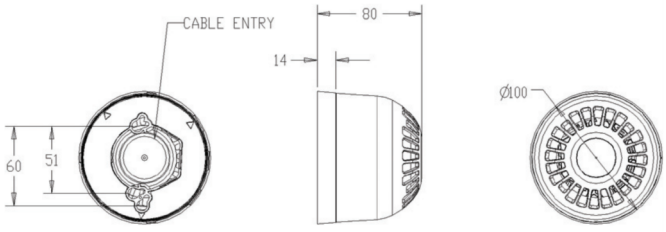


EDWARDS
Built for Resilience

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 7 March 2025 - 11:37