
EST-XLOGOUT-8C

Scheda 8 uscite logiche (control slot)

Overview

The logical output card has eight fully programmable relays which can be used for acknowledge the various states of the EST ENT VES outside to other systems. The channels from 1 to 4 are equipped with NC and channels from 5 to 8 with NO type of relays.

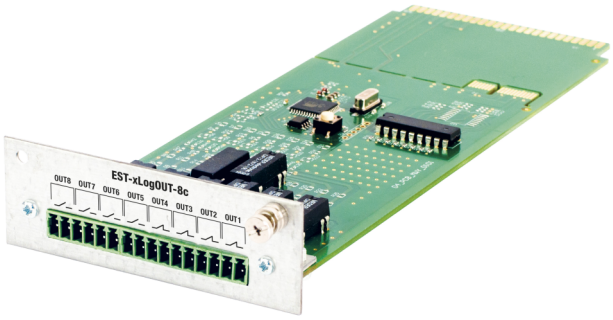

EST-XLOGOUT-8C

Scheda 8 uscite logiche (control slot)

Specifiche tecniche

EDWARDS
Built for Resilience

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57