DC107

Steel door recessed mount contact

Contacts

The DC107/124/125/887/888 contacts are designed specifically for use in steel doors commonly found in commercial building applications. Many models including, wide gap, CO and biased for high security applications make the series the most widely used and comprehensive line available.

Easy installation

The unique housing design features a rugged unibody construction with flexible ribbed sides for quick, secure installation without gluing. The magnet housing isolates the magnet from the surrounding steel for maximum gap distances, both make and break.



Details

- Special design for steel mounting
- Also suitable for select timber frame doors
- Self-lock mounting
- Comprehensive product range
- Standard 2 m wire length
- Tamper loop provided
- Built-in resistors available to special order

DC107

Steel door recessed mount contact

Technical specifications

General

Application type	Versenkte Montage
Contact type	NC
Connectivity	4 wires, 2 m

Wired/wireless

Wired-wireless	Verdrahtet
Operating gap	9 mm (max.)

Physical

Dimensions magnet	24 x 40 mm (Ø x H)
Dimensions contact / sensor	24 x 29 mm (Ø x H)
Diameter	19 mm
Borehole diameter	19.1 mm
Colour	Weiß

Regulatory

EN50131 grade	Klasse 2

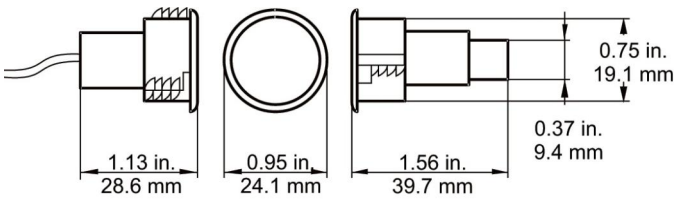

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 13 August 2026 - 11:05