
EST-xCtrLine-2

Scheda di controllo 2 linee altoparlanti

Overview

EST-xCTRLN-2 provides 2 independent speaker line outputs (A, B). Card allows to switch between main and spare amplifiers. Line measurement methods can be made by: Impedance, Loop or End of Line Module (EOL).
The measurement method is selected from the software configuration. EST-xCTRLN-2 provides fault detection, opening and ground leakage.

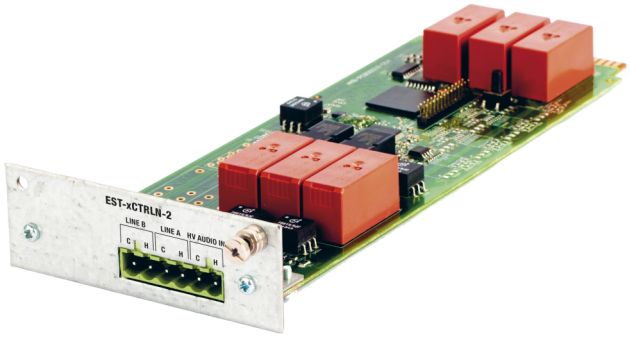

EST-xCtrLine-2

Scheda di controllo 2 linee altoparlanti

Specifiche tecniche

EDWARDS
Built for Resilience

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57