SC-41-0200-0001-99


Modulo 2 ingressi/uscite SmartCell per zona di allarme incendio wireless

Overview

The SmartCell Input / Output Device is quick and easy to install and offers individual addressing at the SmartCell Control Panel.

Features include two resistor monitored inputs, two voltage free outputs and bidirectional 868 MHz communication.

This device is third party certified and compatible with the full SmartCell product range.

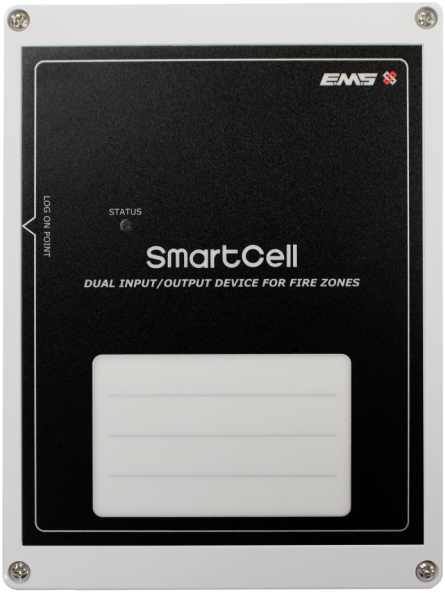

Dettagli

- Completa comunicazione wireless con la centrale di controllo
- Veloce e semplice da installare
- Due ingressi monitorati da resistenza
- Due uscite relè libere da tensione
- Per la connessione dei dispositivi di rivelazione incendio

SC-41-0200-0001-99

Modulo 2 ingressi/uscite SmartCell per zona di allarme incendio wireless

Specifiche tecniche

General

Wireless frequency	868 MHz

Input

Input quantity	2

Physical

Mounting type	Wandmontage

Environmental

Environment	Drinnen

Regulatory

Compliancy	CE
Certification	CPR

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57