ACA-BL10-100

LHD Cable Accessory - Bracket "L", 100mm (3.9") (Zintec) w/ Sleeve - Qty 100


L-Bracket

The ACA-BL series L-brackets is designed to support linear heat cable above the risk area e.g. the top run of a cable tray. A silicon protection sleeve is supplied with the unit to protect the sensor cable when fastened to the bracket.

Installation

The ACA-BL may be fitted to the cable tray and secured in place using a suitable bolt and nut at one end. The hole at the other end of the bracket allows for the securing of the sensor cable using a silicone sleeve and cable tie. The L-bracket allows support for the sensor cable at the selected distance away from the detection area.

Recommended spacing: 1m

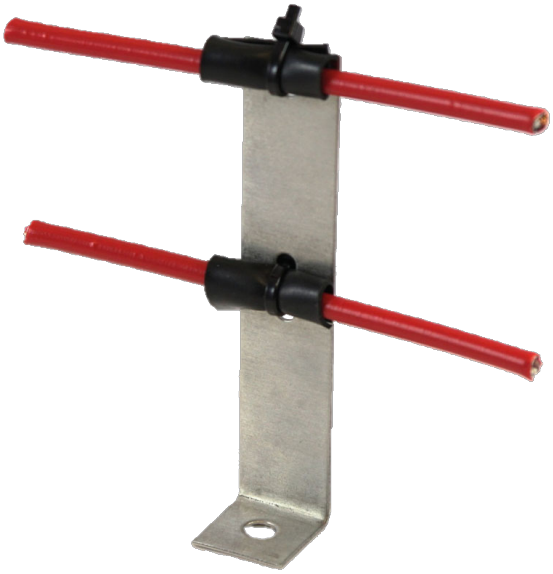

Details

- Easy installation of linear heat cable
- For use on cable trays
- Available in zintec
- Available in quantities of 100

ACA-BL10-100

LHD Cable Accessory - Bracket "L", 100mm (3.9") (Zintec) w/ Sleeve - Qty 100

Technical specifications

Physical

Physical dimensions	20 x 100 mm (W x L)
Net weight	2.6 kg
Mounting type	Montaż nawierzchniowy
Material (body)	Stal nierdzewna, Zintec (stal ocynkowana)

Environmental

Environment	Indendør, Udendørs

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 12 November 2025 - 15:34