# 178701

## ZP755WV-2R Weatherproof Sounder/VID, red

### General

The ZP755WV-2R is an addressable, weatherproof sounder/beacon, designed for use on ZP addressable fire detection and alarm systems. The device is developed for outdoor applications.

Installed directly onto and powered by the ZP wiring loop, the ZP755 range enables the system designer to offer a complete ZP addressable system on a single pair of wires.  Installation costs are greatly reduced, whilst system integrity, sounder options and programmed alarm organisation are significantly increased.

### High efficiency, low energy design

High efficiency acoustic design, low energy sound gun transducer and low current Light Emitting Diode (LED) visual element, enables up to 24 sounder beacons to be connected to a one kilometer loop of 1.5 $mm^2$ cable, with a wiring run of 50 m to the first device.

In systems where loop lengths or current requirements are excessive, ZP755WV-2R sounder beacons can be powered directly from an external power supply.

### Range of sound outputs

Continuous, intermittent and two-tone audible outputs are available from which any combination can be chosen to provide alert and evacuate, two stage alarms. All sound types comply with most local codes (for example BS 5839 Part 1 recommended frequencies in the UK). The ZP755WV-2R produces a sound output of 95 dBA, measured at 1 m. A volume control is included for areas where a reduced sound output is required.

Molded in high impact red thermoplastic, the sounder beacon features a red lens.



### Details

- Weatherproof
- Sounder with visual indicator in a single unit
- High sound output
- Low current LED based visual element
- High efficiency sound gun transducer
- Up to 30 devices powered directly from loop wiring
- EN54:3 approved and CPR certified

# 178701
## ZP755WV-2R Weatherproof Sounder/VID, red

## Technical specifications

### General

| | |
|---|---|
| Compatibility | ZP7 Series Systems |
| Line monitoring | Open/short circuit |
| Addressing method | Mikroprzełączniki |
| Monitoring | Device removal, Device type, Sound output |
| Devices per loop | <30 (1 km loop of 1.5 mm² cable, 50 m to first device) |
| Addressing method | 7 way dip switch |

### Electrical

| | |
|---|---|
| Operating voltage | Loop 19.5 to 20.5 V<br>External 18 - 30 VDC<br>max. 4 V line loss |
| Current consumption | <820 µA (Quiescent - when loop powered)<br><9.6 mA (Active - when loop powered)<br><470 µA (Quiescent - when externally powered)<br><500 µA (Active - when externally powered) |

### Sounder

| | |
|---|---|
| Output level | <90 dB(A) (Tone dependent) |
| Frequency | 980 Hz (continuous)<br>980 Hz (0.5 sec on/off)<br>980/670 Hz (warble) |
| Selectable tones | User configurable |
| Synchronization | Automatic |

### VID

| | |
|---|---|
| Colour | Red |
| Rating | 1 J |
| Flash frequency | 0.8 Hz<br>48 flashes/min |
| Synchronization | Automatic |
| Light source | Red LED array |

### Physical

| | |
|---|---|
| Physical dimensions | 120 x 150 mm (Ø x H) |
| Net weight | 300 g |
| Colour | Rød |
| Mounting type | Montaż nawierzchniowy |
| Mounting position | Sufitowy, Naścienny |
| Material | Støbt termoplast |
| Wiring | 2 core loop |

### Environmental

| | |
|---|---|
| Vandal proof | No |
| Operating temperature | -25 to +70°C |
| Storage temperature | -25 to +70°C |
| Relative humidity | 10 to 95% noncondensing |
| Environment | Udendørs |
| IP rating | IP33C |

### Regulatory

| | |
|---|---|
| Compliancy | CE, REACH, RoHS 2 |
| Certification | CPR |
| Standards | EN54-3 |

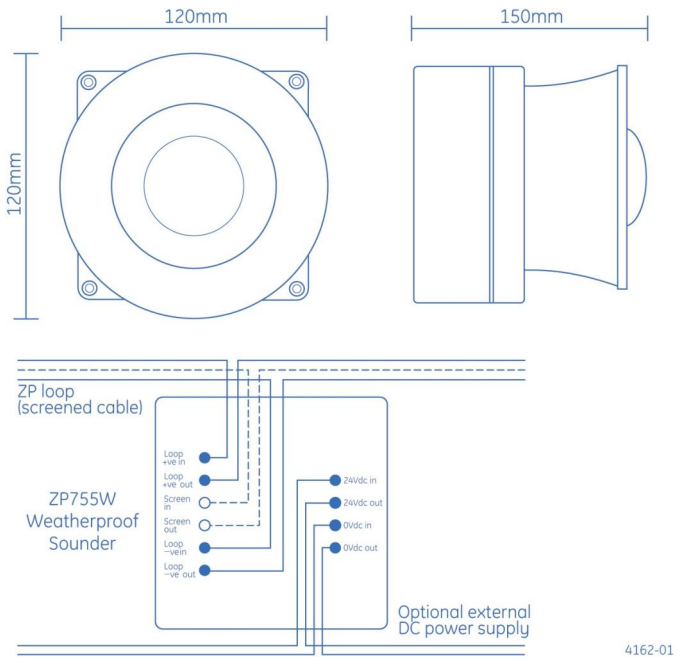


As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 16 October 2026 - 11:31