ASC366

Conventional Ceiling Mount VAD, Multi tone, Shallow base - RED with RED flash



Details

- High sound output with Pulse Alert™ technology
- 32 Tones user selectable
- Automatic syncronisation
- Volume control and adjustable flash rate
- Anti-Tamper locking mechanism
- Shallow mouting base with wiring to the base
- Seperate sounder and beacon and control
- EN54:3 and EN54:23 approved, CPR Certified

ASC366

Conventional Ceiling Mount VAD, Multi tone, Shallow base - RED with RED flash

Technische specificaties

Electrical

Current consumption	Sounder: 5.1 mA, Beacon: 20 mA @ 0.5 Hz / 40 mA @ 1 Hz

Physical

Net weight	215 g
Colour	Rød
Mounting type	Montaż na podstawie
Mounting position	Sufitowy
Mounting base	Płytki
Material	Wysokoudarowy poliwęglan

Environmental

Operating temperature	-25 to +70°C
Relative humidity	5 to 95%
Environment	Indendør
IP rating	IP21

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	EN54-23, EN54-3

Compatibele producten

Categorie	Referentie	Beschrijving
Notification device	ASC366W	Conventional Ceiling Mount VAD, Multi tone, Shallow base - WHITE with RED flash
Notification device	ASC367	Conventional Ceiling Mount VAD, Multi tone, Deep base - RED with RED flash

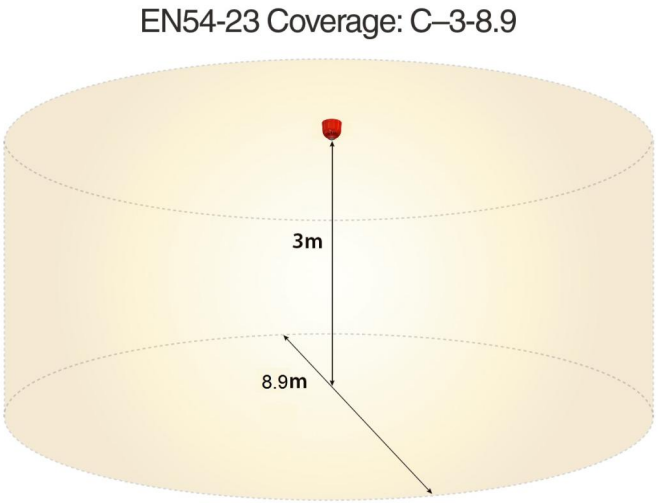

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57