ASC367

Conventional Ceiling Mount VAD, Multi tone, Deep base - RED with RED flash



Details

- High sound output with Pulse Alert™ technology
- 32 Tones user selectable
- Automatic syncronisation
- Volume control and adjustable flash rate
- Anti-Tamper locking mechanism
- Deep mouting base with side cable entry and wiring to the base
- Seperate sounder and beacon and control
- EN54:3 and EN54:23 approved, CPR Certified

ASC367

Conventional Ceiling Mount VAD, Multi tone, Deep base - RED with RED flash

Technische specificaties

Electrical

Current consumption	Sounder: 5.1 mA, Beacon: 20 mA @ 0.5 Hz / 40 mA @ 1 Hz

Physical

Net weight	215 g
Colour	Rød
Mounting type	Montaż na podstawie
Mounting position	Sufitowy
Mounting base	Głeboki
Material	Wysokoudarowy poliwęglan


Environmental

Operating temperature	-25 to +70°C
Relative humidity	5 to 95%
Environment	Indendør, Udendørs
IP rating	IP65

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	EN54-23, EN54-3

EN54-23 Coverage: C–3-8.9

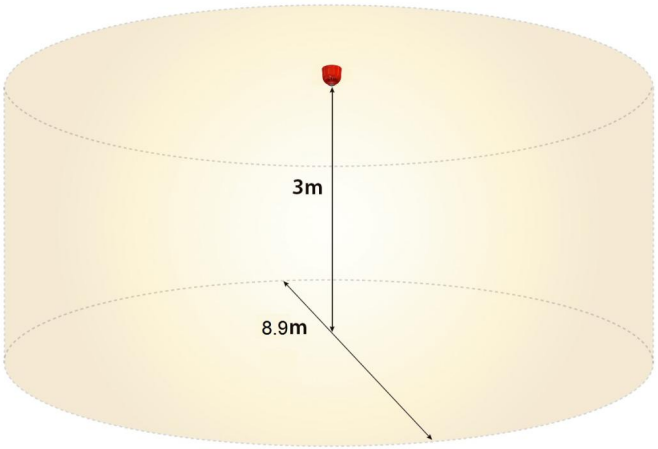

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57