# ACA-BU06SS-100

## LHD Cable Accessory - Bracket "U", 60mm (2.4") (St Steel) w/ Sleeve - Pack of 100

### Channel Bracket

The ACA-BU06 series U-bracket (channel bracket) is designed to secure linear heat sensor cable to metal surfaces where there is no return edge available to fix a bracket or clip e.g. fixed roof storage tanks. A silicon protection sleeve is supplied with the unit to protect the linear heat cable when fastened to the bracket.

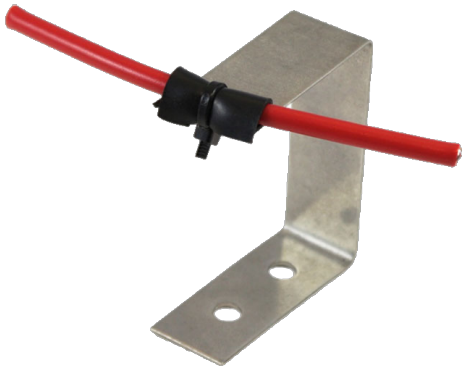

### Installation

The ACA-BU06 should be secured in place using suitable bolts and nuts at one end. The hole in the end of the bracket allows for the securing of the sensor cable using a silicone sleeve and cable tie. The U-bracket (channel bracket) supports the sensor cable approx. 60mm away from the mounting point.

Recommended spacing: 1m

### Details

- Easy installation of linear heat cable
- For use on metal surfaces e.g. fixed roof storage tanks
- Available in stainless steel
- Available in quantities of 100

# ACA-BU06SS-100

## LHD Cable Accessory - Bracket "U", 60mm (2.4") (St Steel) w/ Sleeve - Pack of 100

## Technical specifications

### Physical

| | |
|---|---|
| Physical dimensions | 20 x 60 x 50 mm (W x H X D) |
| Net weight | 850 g |
| Mounting type | Montagem em superfície |
| Material (body) | Aço inoxidável |

### Environmental

| | |
|---|---|
| Environment | Indendør, Udendørs |

KIDDE GLOBAL SOLUTIONS

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 4 January 2024 - 14:42