ASC366W

Conventional Ceiling Mount VAD, Multi tone, Shallow base - WHITE with RED flash



Details

- High sound output with Pulse Alert™ technology
- 32 Tones user selectable
- Automatic syncronisation
- Volume control and adjustable flash rate
- Anti-Tamper locking mechanism
- Shallow mouting base with wiring to the base
- Seperate sounder and beacon and control
- EN54:23 and CPD Certified

ASC366W

Conventional Ceiling Mount VAD, Multi tone, Shallow base - WHITE with RED flash

Technische specificaties

Electrical

Stroomverbruik	Sounder: 5.1 mA, Beacon: 20 mA @ 0.5 Hz / 40 mA @ 1 Hz

Physical

Netto gewicht	215 g
Kleur	Hvid
Materiaal	Alto impacto policarbonato


Environmental

Bedrijfstemperatuur	-25 to +70°C
Relatieve vochtigheid	5 to 95%
Omgeving	Indendør
IP-classificatie	IP21

Regulatory

Certificering	EN54-23, EN54-3

EN54-23 Coverage: C–3-8.9

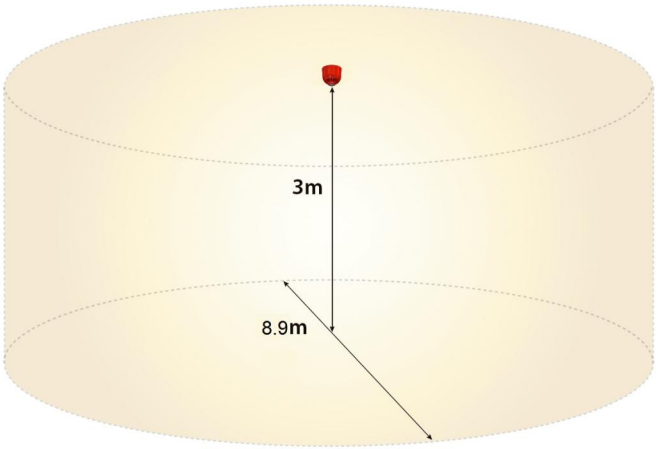

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar be.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57